


Cleaning instructions for Witex elastoclic pur

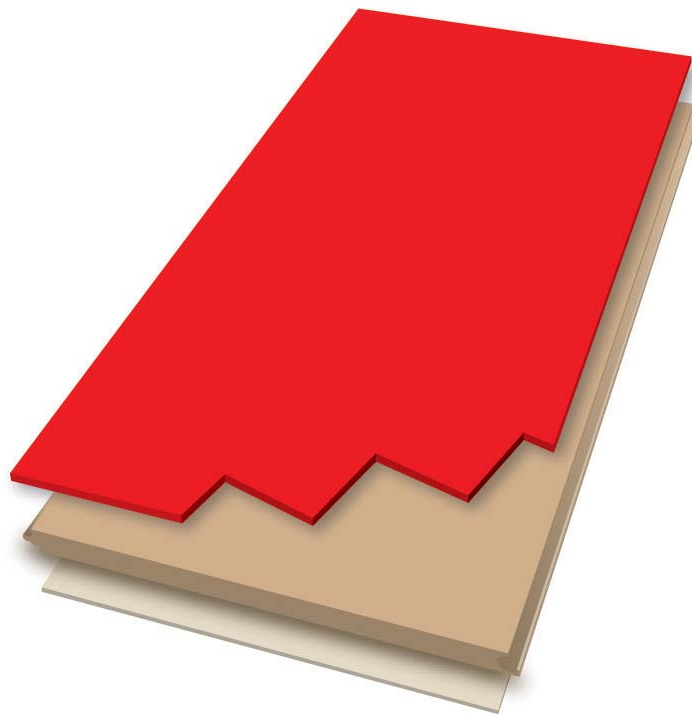

elastoclic pur is a high-quality resilient flooring with a polyurethane surface which provides ideal conditions for highly cost-effective cleaning methods, including use of floor washers, with long maintenance intervals.

The use of polishes or polymer dispersion surface treatments is not recommended!

Preventive measures

Effective anti-soiling protection zones should be provided near entrances where dirt might be brought indoors. This will reduce cleaning costs and significantly extend the life of the floor covering.

Cleaning and anti-dirt precautions during installation

Sand, dust and loose contamination must be removed regularly by sweeping or vacuum cleaning. If further interior outfitting work is to take place after the floor is laid, the covering must be protected by sheeting.

After installation

Once loose dirt has been removed, any remaining dirt must be cleaned away, either by mopping or with the aid of a floor washer. For mechanical removal of dirt, use red pads or brushes. Water with a suitable floor cleaning detergent should be used as a washing solution. Finally rinse with clean water. There is no need for an initial treatment before the floor is first used.

Maintenance

Clean elastoclic pur daily or at longer intervals, depending on requirements. Loose dirt can be removed by sweeping, vacuum cleaning or wiping. Suitable wet cleaning systems include impregnated non-woven cloths or mops. For heavy soiling and very stubborn patches of dirt, loosen dirt from the surface of the elastoclic pur by adding a suitable polyurethane cleaner (not an all-purpose cleaner) to the washing solution. After loosening the dirt, remove it with a moist mop.

Thorough cleaning

Heavy or extreme contamination can be tackled using a floor washing machine. Follow the same process as for post-installation cleaning. Use of red pads or brushes and a wet vacuum cleaner will make the process considerably easier (the surface should not be allowed to remain wet for long periods). Rinse with clean water after any thorough clean.

There is no need for an initial treatment before the floor is first used.

Stain removal

Aggressive substances or anything likely to leave a stain should be removed immediately to reduce their effects on the surface to a minimum. This makes stain removal easier. When using concentrated cleaners or stain removers to treat stains, follow the product manufacturer's instructions.

Technical Information

General instructions



- Fit EN12529 Type W castors to chairs and furniture.
- Fit felt gliders to chair legs.
- Lengthy subjection to solvents (e.g. acetone or higher ketones) can cause deterioration of the surface.
- Minimise slip hazards by cleaning up any oil spills immediately.
- Black rubber tyres or ferrules on chair and table legs can leave visible stains on pale surfaces.

Cleaning work should be carried out according to guidelines published by the Bundesinnungsverband für Gebäudereinigung using latest methods and equipment.

We accept no liability for cleaning and maintenance undertaken in any property.

We will be pleased to answer any request for further cleaning advice or recommendations from cleaning product manufacturers.